
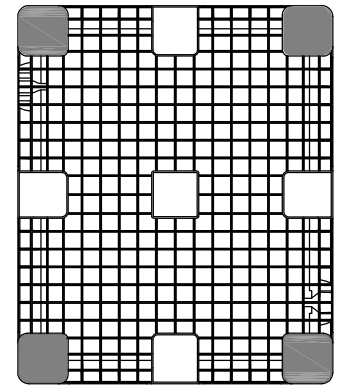
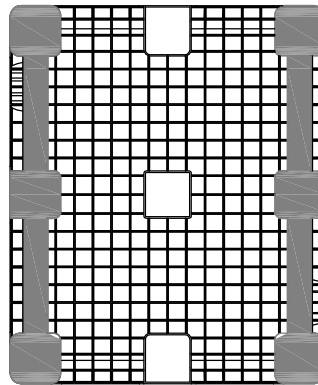
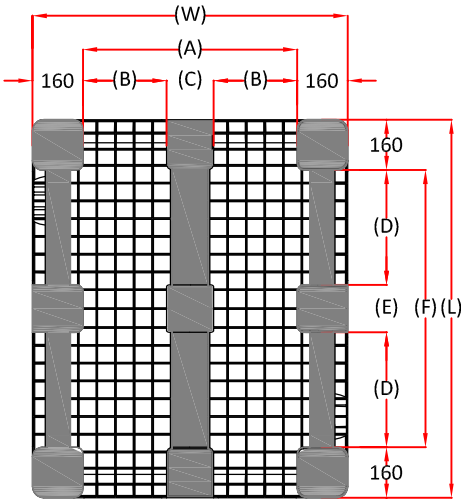


E-LINE

PB-121076-0F00-7

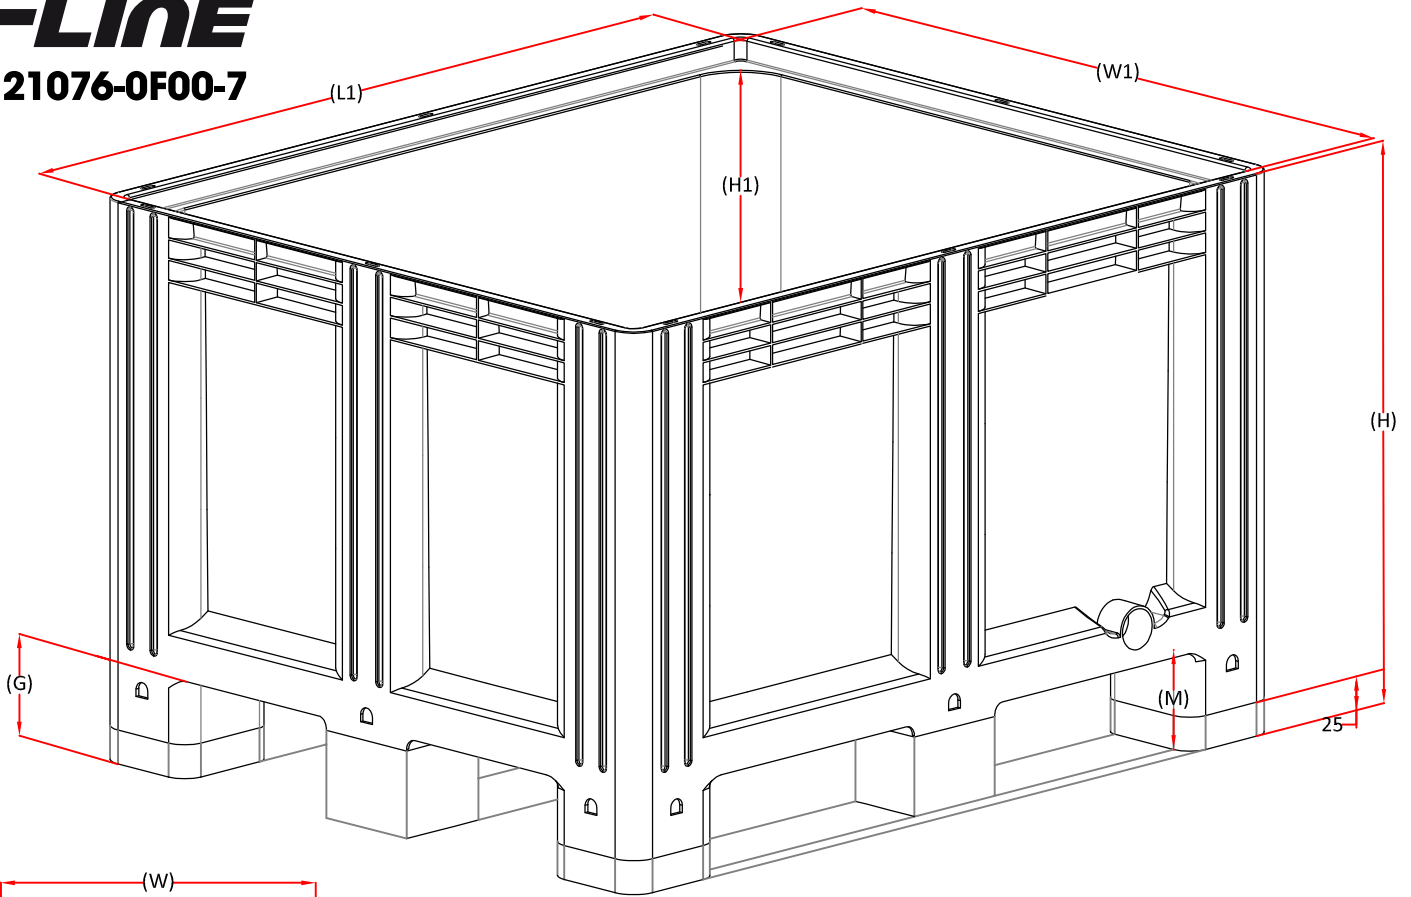

PB-121076-0F00-7

PB-121076-0E00-7

PB-121076-0400-7

Specifications	BOX PALLET	PB-121076-0F00-7	PB-121076-0E00-7	PB-121076-0400-7
External dimension (W,L,H)	mm	1000x1200x780	1000x1200x780	1000x1200x760
Internal dimension (W1,L1,H1)	mm	920x1120x606	920x1120x606	920x1120x606
A	mm	680	680	680
B	mm	265	=	=
C	mm	150	=	=
D	mm	365	365	=
E	mm	150	150	=
F	mm	880	880	880
G	mm	130	130	110
M	mm	100 (95)	100 (95)	=
R	mm			
K	mm			
Tare Weight (*)	Kg	37.5	35	34
Volume	Lt	615	615	615
Loading Capacity per Box (**)	Kg	(#)510 at 23°C	(#)510 at 23°C	(#)510 at 23°C
Stacking Capacity	Kg	5000 at 23°C	5000 at 23°C	5000 at 23°C

MAXIMUM STATIC WEIGHT TO BE CARRIED INDIVIDUALLY BY EACH BOX STANDING ON THE FLOOR, 650 Kg

(*) WEIGHT TOLLERANCE ± 2%

DIMENSION TOLLERANCE ± 7mm

-THE TESTS HAVE BEEN CARRIED OUT AT A TEMPERATURE OF 23°C

-PRODUCT WERE NOT EXPOSED TO ULTRA VIOLET LIGHT

-DRAWINGS & DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

-THE PRESENT CHART CANCELS AND REPLACES ALL PREVIOUSLY ISSUED

(**) FOR LIQUID GOOD THE LOAD RATING DECREASES BY 12%

ENGELS

serving logistics and the environment